




# PLETRONICS VC22S Series Sinewave VCXO



VC22  
13.9 x 9.1 x 3.6 mm  
FR4 Base

## Features


- Voltage Controlled Quartz crystal oscillator
- Sinewave Output
- Vcontrol on pin 1
- Low Jitter
- 5.0V nominal Supply Voltage
- Low G sensitivity

## Applications

Driving A/Ds, D/As, FPGAs  
Digital Video  
Ethernet, GbE  
Medical  
Storage Area Networking  
COTS  
Broad Band Access  
SONET/ SDH/ DWDM  
Base Stations/ Picocell  
Test & Measurement

## Electrical Characteristics

Parameter	Min	Typ	Max	Unit	Condition
Frequency Range	50	-	125	MHz	
Frequency Stability vs. Temperature	-	-	±25	ppm	Includes tolerance at 25°C, frequency vs temperature, supply voltage change, load change, aging for 10 years.
Operating Temperature Range	-20 -40	-	+70 +85	°C	
Supply Voltage $V_{CC}$	4.75	5.0	5.25	V	
Supply Current $I_{CC}$	-	-	30	mA	Output load = 50Ω
Output Waveform	Sinewave				
Output Level	+10	-	-	dBm	
Harmonics	-	-	-30	dBc	
Startup Time	-	-	10	ms	Time for output to reach specified frequency
Vcontrol Input Impedance	100	-	-	kΩ	
Modulation Bandwidth	1	-	-	kHz	(-3dB cut-off frequency)
Vcontrol Range	0	2.5	5.0	V	
Pullability	± 30	-	-	ppm	
Linearity	-	-	10	%	Slope Positive
G-Sensitivity	-	1.5	-	ppb/g	(worst axis)
Phase Noise	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	- - - - - -	-89 -119 -146 -167 -176 -179	- - - - - -	dBc/Hz 25°C ± 2°C at 100 MHz
Storage Temperature Range	-45	-	+90	°C	

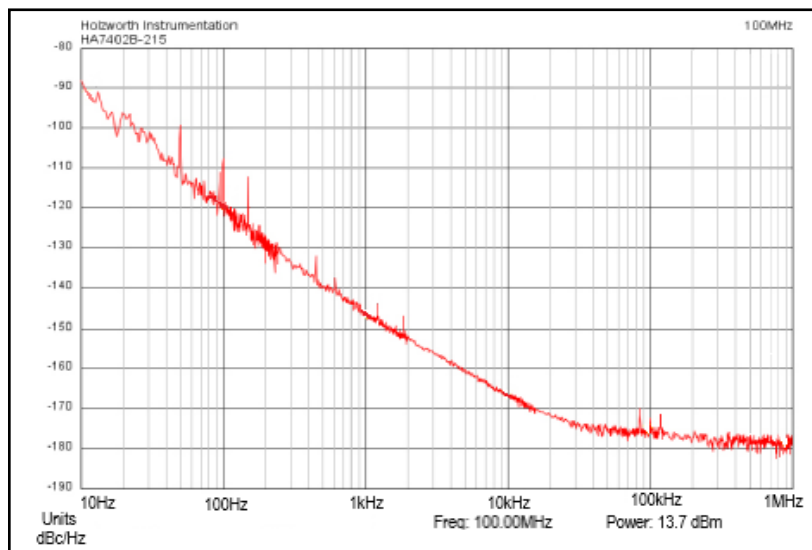

Typical Phase Noise 100MHz



# PLETRONICS VC22S Series Sinewave VCXO

## Device Marking

**PLE VC22S**  
**FF.FFFM**  
• **YMDxx**

PLE = Pletronics  
VC22S = Part Series  
FF.FFF = Frequency in MHz  
YMD = Date Code (see table below)  
All other markings are internal codes

Note: Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from marking.  
External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Codes for Date Code YMD (Year Month Day)

Code	3	4	5	6	7	Code	A	B	C	D	E	F	G	H	J	K	L	M
Year	2023	2024	2025	2026	2027	Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC

Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G
Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Code	H	J	K	L	M	N	P	R	T	U	V	W	X	Y	Z	
Day	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	

## Package Labeling

P/N Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Courier New  
Bar code is 39-Full ASCII

RoHS Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Arial

P/N:   
PLE Part Number  
Customer P/N:   
12345678  
Qty:  500 D/C:   
MSL: 1 2A1

RoHS Compliant

2nd Lvl Interconnect

Category=e4

Max Safe Temp=245C for 10s 2X Max

Pletronics Inc. certifies this device is in accordance with the RoHS and REACH directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's  
Weight of the Device: 1.34 grams  
Moisture Sensitivity Level: 1 As defined in J-STD-020D  
Second Level Interconnect code: e4

## Environmental



Reliability: Environmental

Parameter	Reference Standard	Condition
Mechanical Shock	DIN EN 60068-2-27	Test Ea; 6 shocks per axis 100g; 6ms both directions
Vibration	DIN EN 60068-2-6	Test Fc; 10~55Hz; 0.75mm Peak; 55~2000Hz; 10g Peak; 10 Cyc.; 3 axis; 1 Oct./min
Thermal Shock	DIN EN 60068-2-14	Test Na; 30 min @ each temperature, 10 cycles, Transfer <1min, -40°C ± 3°C; 85°C ± 3°C


### Thermal Characteristics:

The maximum die or junction temperature is 125°C

## Mechanical Dimensions (mm)

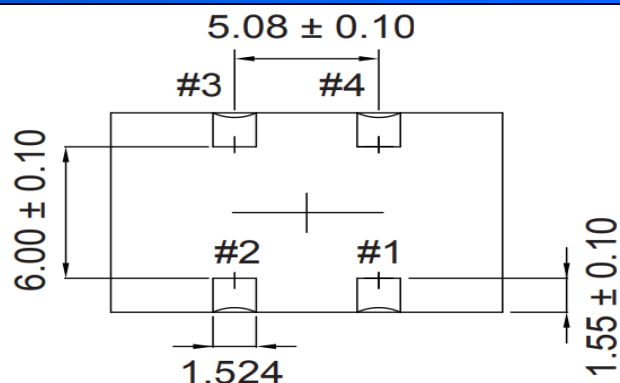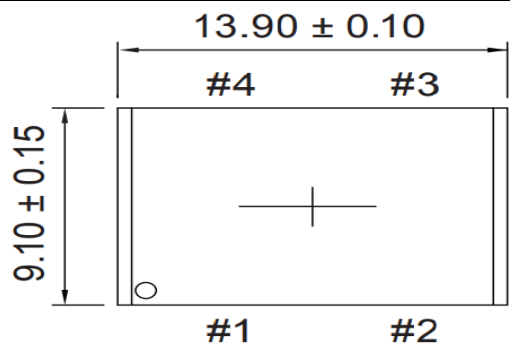


## [ SIDE VIEW ]

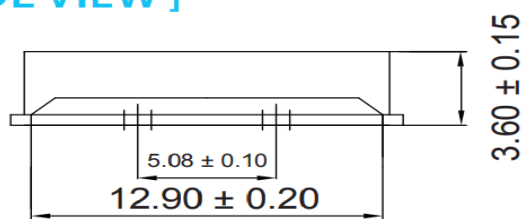

Pin#	Function
1	Vcon
2	GND
3	Output
4	V <sub>DD</sub>

## Solder Pad Layout (mm)

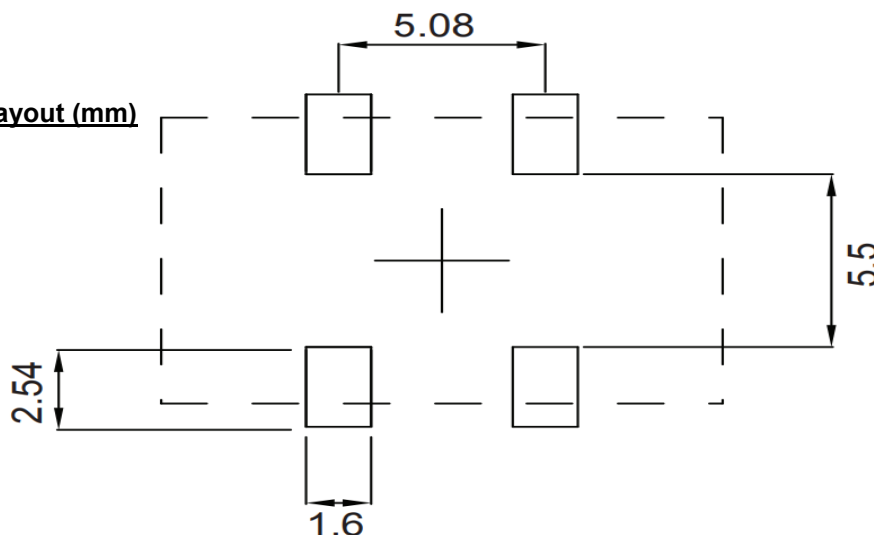

### Pad Layout

Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.


**Terminations: ENIG Gold 0.05~0.12μm over Nickel 2~4μm**

For Optimum Jitter Performance, Pletronics recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans

## Reflow Cycle

Maximum Reflow Conditions in accordance with IPC/JEDEC J-STD-020C "Pb-free"


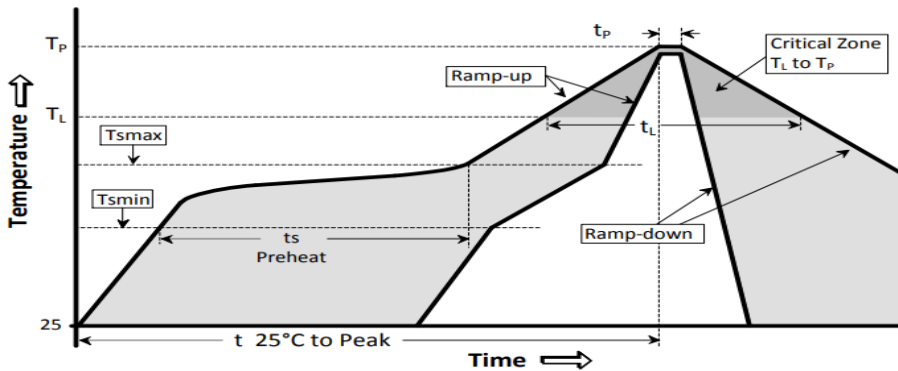


The part may be reflowed 2 times without degradation (typical for lead free processing).

Temperature Profile	Symbol	Condition	Unit
Average ramp-up rate	$(T_{Smax} \text{ to } T_P)$	3°C / second max	°C / s
Ramp down Rate	$T_{cool}$	6°C / second max	°C / s
Time 25°C to Peak Temperature	$T_{to-peak}$	8 minutes max	min
<b>Preheat</b>			
Temperature min	$T_{Smin}$	150	°C
Temperature max	$T_{Smax}$	200	°C
Time $T_{Smin}$ to $T_{Smax}$	$t_s$	60 – 180	sec
<b>Soldering above liquidus</b>			
Temperature liquidus	$T_L$	217	°C
Time above liquidus	$t_L$	60 – 150	sec
<b>Peak temperature</b>			
Peak Temperature	$T_p$	260	°C
Time within 5°C of peak temperature	$t_p$	20 – 40	sec

## Tape and Reel

Tape and Reel available for quantities of 250 to 500 per reel, cut tape for < 250. 24mm tape, 12mm pitch.

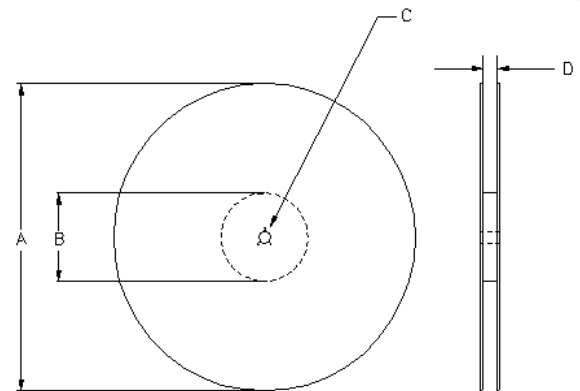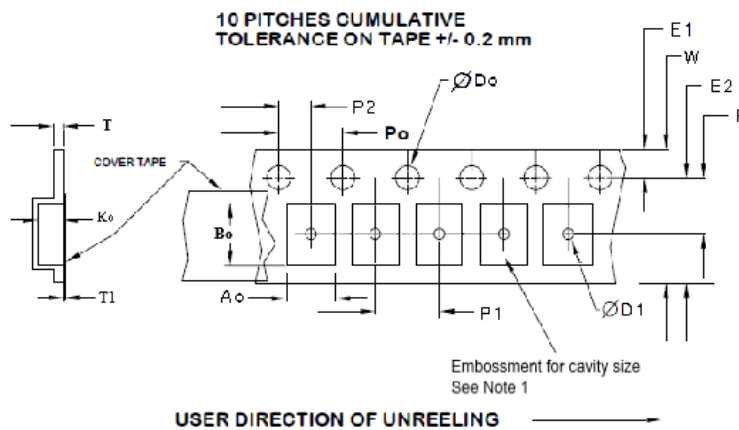

USER DIRECTION OF UNREELING

Reel Dimensions (may vary) Table 3

	A		B		C	D
Reel Size	Inches	mm	Inches	mm	mm	mm
13	13.0	330	4	100	13.0 ± 0.5	Tape size +0.4 +2.0 -0.0

Tape Variable Dimensions Table 2

Tape Size	E2 typ	F	P1	W max	A <sub>0</sub>	B <sub>0</sub>	K <sub>0</sub>
24mm	22.25	11.5 ± 0.1	12.0 ± 0.1	24.3	9.45 ± 0.2	14.3 ± 0.2	5.3 ± 0.2

Dimensions in mm Drawing Not to scale

Note 1: Embossed cavity to conform to EIA-481-B

Tape Constant Dimensions Table 1

Tape Size	Do	D1	E1	Po	P2	T max	T1 max
24mm	1.5 ± 0.1	1.5 ± 0.1	1.75 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	0.4	0.1



## Important Notice

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

### Contacting Pletronics Inc.

Pletronics, Inc.  
19013 36th Ave. West  
Lynnwood, WA 98036-5761  
U.S.A.

Tel: 425.776.1880  
Fax: 425.776.2760  
email: [ple-sales@pletronics.com](mailto:ple-sales@pletronics.com)  
URL: [www.pletronics.com](http://www.pletronics.com)