



# PLETRONICS SM33J Series 2.5V CMOS Clock Oscillator



SM33JW  
2.5 x 2.0 x 0.81 mm  
LCC Ceramic Package

## Features

- Pletronics' SM33J Series is a quartz crystal controlled precision square wave oscillator
- CMOS Output (will interface with TTL devices)
- Enable/Disable Function includes low standby power
- Low Jitter
- 2.5V nominal Supply Voltage
- 1.25-125 MHz Frequency Range

## Applications

Driving A/Ds, D/As, FPGAs  
Digital Video  
Ethernet, GbE  
Medical  
Storage Area Networking  
COTS  
Broad Band Access  
SONET/ SDH/ DWDM  
Base Stations/ Picocell  
Test & Measurement

## Electrical Characteristics

| Parameter   | Min  | Typ              | Max  | Unit  | Condition  |                             |
|---|--|------------------|--|-------|--|-----------------------------|
| Frequency Range <sup>2</sup>  | 1.25   | -                | 125  | MHz   | Consult factory for other options  |                             |
| Frequency Stability <sup>2</sup><br>± 20 = <b>20*</b> , ± 25 = <b>44</b> , ± 50 = <b>45</b> | ±20  | -                | ±50  | ppm   | Includes supply voltage change, load change, aging for 1 year at 25°C ± 2°C, shock, vibration and temperatures. *limited frequencies, see page 3 |                             |
| Operating Temperature Range <sup>2</sup>  | -10<br>-20<br>-40<br>-40   | -<br>-<br>-<br>- | +70<br>+70<br>+85<br>+105                          | °C    | Standard range<br>Extended range <b>C</b> option<br>Extended range <b>E</b> option<br>Extended range <b>G</b> option                             |                             |
| Supply Voltage <sup>1,2</sup> (Vcc)   | 2.25   | 2.5              | 2.75   | Volts | 2.5V ± 10%   |                             |
| Output Waveform   | CMOS   |                  |  |       |  |                             |
| Duty Cycle  | 45   | -                | 55   | %     | @0.5Vcc level  |                             |
| Output V <sub>HIGH</sub> (VOH)  | V <sub>CC</sub> - 0.4  | -                | -  | V     |  |                             |
| Output V <sub>LOW</sub> (VOL)   | -  | -                | 0.4  | V     |  |                             |
| Output T <sub>RISE</sub> and T <sub>FALL</sub>  | -  | 1                | 5  | ns    | C <sub>LOAD</sub> = 15 pF<br>10% to 90% of V <sub>CC</sub><br>See Load Circuit   |                             |
| Startup Time  | -  | -                | 10   | ms    | Time for output to reach specified frequency   |                             |
| V <sub>DISABLE</sub> (VIH)  | -  | -                | 30   | %     | Of V <sub>CC</sub> applied to Pad 1  |                             |
| V <sub>ENABLE</sub> (VIL)   | 70   | -                |  |       |  |                             |
| Enable Time   | -  | -                | 100  | ns    | Time for output to reach a logic state   |                             |
| Disable Time  | -  | -                | 200  | ns    | Time for output to reach a high Z state  |                             |
| Enable/Disable Internal Pull-up   | 30   | 70               | 150  | Kohm  | To V <sub>CC</sub> , Pad 1 open or ≥0.7V <sub>CC</sub>   |                             |
| Standby Current (Pad 1 low)   | -  | -                | 10<br>20   | µA    | -40 to 85°C<br>-40 to 105°C  | Output disabled to tristate |
| Output Leakage Current  | -<br>-10   | -                | +10<br>-   | µA    | Out = V <sub>CC</sub><br>Out = Gnd   | Pad 1 low                   |
| Phase Noise   | 10 Hz<br>100 Hz<br>1 kHz<br>10 kHz<br>100 kHz<br>1 MHz<br>10 MHz | -                | -63<br>-94<br>-125<br>-144<br>-151<br>-155<br>-158 | -     | dBc/Hz   | 25°C ± 2°C at 100 MHz       |
| Storage Temperature Range   | -55  | -                | +125   | °C    |  |                             |

Notes: Specifications with Pad 1 E/D open circuit

<sup>1</sup> Place an appropriate power supply bypass capacitor next to device for correct operation

<sup>2</sup> Specified by part number



# PLETRONICS SM33J Series 2.5V CMOS Clock Oscillator

## Electrical Characteristics

| Parameter               | Min | Typ | Max | Unit | Condition |
|-------------------------|-----|-----|-----|------|-----------|
| Supply Current $I_{cc}$ |     | 0.6 | 1.2 |      | 3 MHz     |
|                         |     | 0.9 | 1.8 |      | 5 MHz     |
|                         | -   | 0.9 | 1.8 |      | 10 MHz    |
|                         | -   | 1.1 | 2.2 |      | 20 MHz    |
|                         | -   | 3.0 | 6.0 | mA   | 50 MHz    |
|                         | -   | 3.0 | 6.0 |      | 65 MHz    |
|                         |     | 4.0 | 8.0 |      | 85 MHz    |
|                         |     | 4.5 | 8.5 |      | 100 MHz   |
|                         |     |     |     |      |           |

Specifications with Pad 1 E/D circuit open



# PLETRONICS SM33J Series 2.5V CMOS Clock Oscillator

| Part Number  |  |   |   |                                |                  |   |
|--------------|--|---|---|--------------------------------|------------------|---|
| Series Model | Frequency Stability                                    |   | Operating Temperature Range   | Supply Voltage V <sub>CC</sub> | Frequency in MHz | Optional T&R Packaging code   |
| SM33         | 45   | J | E   | W                              | - 75.0M          | -XX   |
|              | 45 = ± 50 ppm (STD)<br>44 = ± 25 ppm<br>20* = ± 20 ppm |   | Blank = -10 to +70°C (STD)<br>C = -20 to +70°C<br>E = -40 to +85°C<br>G = -40 to +105°C** | W = 2.5V ±10%                  | 1.25 - 125 MHz   | T250 = 250 per Reel<br>T500 = 500 per Reel<br>T3K = 3000 per Reel (Std) |

\* Contact PLE sales for limited frequencies. Full frequency range available which excludes aging.  
\*\* ±50ppm

## Device Marking

|                           |
|---------------------------|
| <b>FFF.FF</b><br>• YMDxxx |
|---------------------------|

P = Pletronics  
FF.FF = Frequency in MHz  
YMD = Date Code, All other marking is internal code

Note: Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Codes for Date Code YMD (Year Month Day)

| Code | 4    | 5    | 6    | 7    | 8    | Code  | A   | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   |
|------|------|------|------|------|------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Year | 2024 | 2025 | 2026 | 2027 | 2028 | Month | JAN | FEB | MAR | APR | MAY | JUN | JUL | AUG | SEP | OCT | NOV | DEC |

| Code | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  | G  |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Day  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| Code | H  | J  | K  | L  | M  | N  | P  | R  | T  | U  | V  | W  | X  | Y  | Z  |    |
| Day  | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |    |

## Package Labeling

P/N Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Courier New  
Bar code is 39-Full ASCII

RoHS Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Arial




|   |
|---|
| <b>P/N:</b><br>PLE Part Number<br><b>Customer P/N:</b><br>12345678<br><b>Qty:</b><br>3000 <b>D/C</b><br>2A1<br>MSL: 1 |
|---|

|   |
|---|
| <b>RoHS Compliant</b><br>2nd LvL Interconnect<br>Category=e4<br>Max Safe Temp=260C for 10s 2X Max |
|---|

Pletronics Inc. certifies this device is in accordance with the RoHS and REACH directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's  
Weight of the Device: 0.015 grams  
Moisture Sensitivity Level: 1 As defined in J-STD-020D  
Second Level Interconnect code: e4

## Mechanical Dimensions

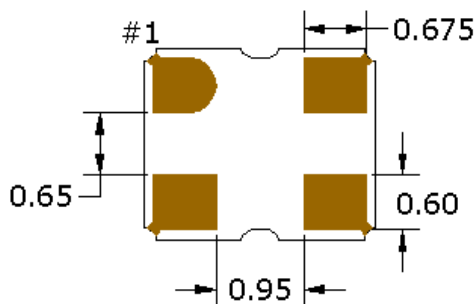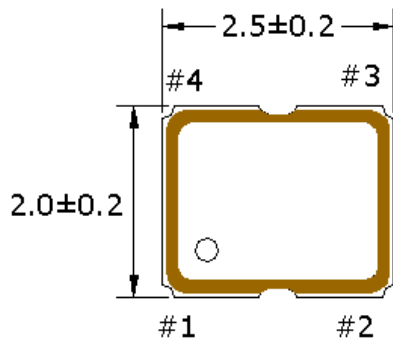


Shape of pad 1 may differ

Dimensions in mm

## Pad Connections

| Pad | Function       |
|-----|----------------|
| 1   | Enable/Disable |
| 2   | Ground         |
| 3   | Output         |
| 4   | Vcc            |

| ENABLE/DISABLE        |                   |
|-----------------------|-------------------|
| Pad 1                 | Output            |
| V <sub>IH</sub> /Open | Active            |
| V <sub>IL</sub> /Gnd  | Disabled/Tristate |

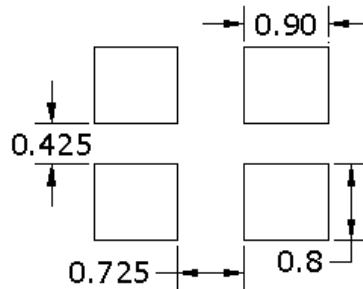

### Pad Layout


Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

**Contacts (pads): Gold (0.3 to 1.0 μm) over Nickel (1.27 to 8.89 μm)**

For Optimum Jitter Performance, Pletronics recommends:


- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans

## Electrical Test / Load Circuit

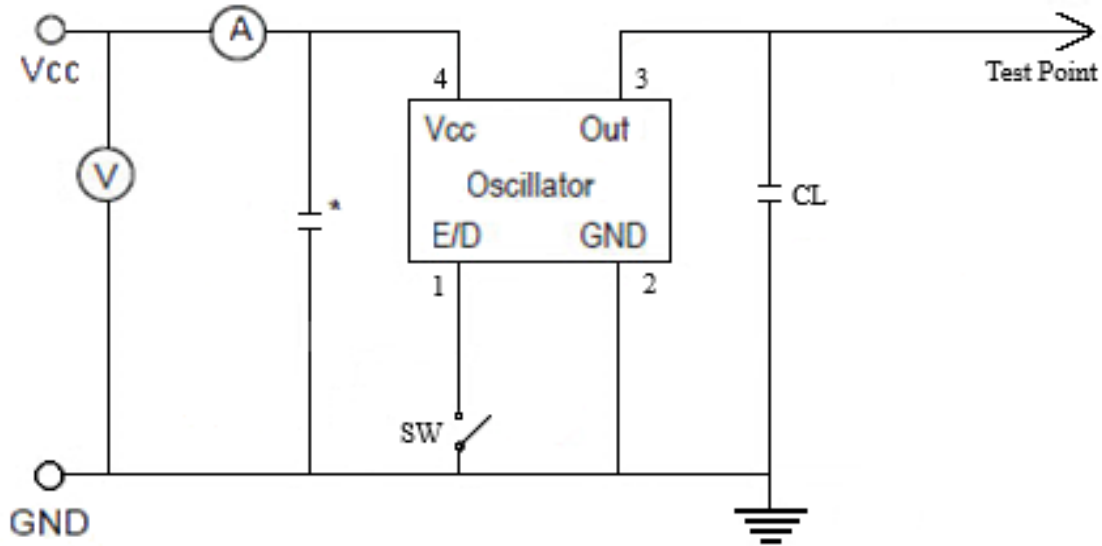

Notes:

CL: 15pF Includes the input capacitance of oscilloscope  
 \* 0.01 $\mu$ F external by-pass filter is recommended

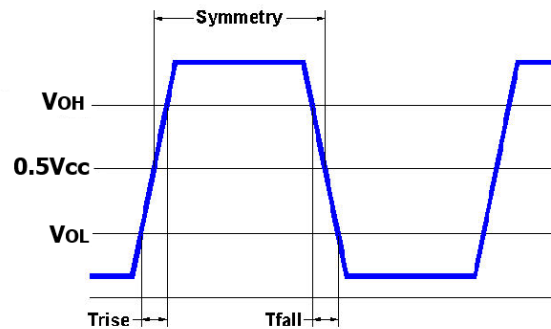

## Environmental / ESD Ratings

Reliability: Environmental

ESD Rating

| Parameter        | Condition                             |
|------------------|---------------------------------------|
| Mechanical Shock | MIL-STD-883, Method 2002, Condition B |
| Vibration        | MIL-STD-883, Method 2007, Condition A |
| Solderability    | IPC J-STD-002                         |
| Thermal Cycle    | MIL-STD-883 Method 1010, Condition B  |

| Model            | Min. Voltage | Condition   |
|------------------|--------------|-------------|
| Human Body Model | 2000V        | JESD22-A114 |
| Machine Model    | 200V         | JESD22-A115 |


Absolute Maximum Ratings

### Thermal Characteristics:

The maximum die or junction temperature is 150°C

| Parameter                      | Unit                            |
|--------------------------------|---------------------------------|
| V <sub>CC</sub> Supply Voltage | -0.3V to +4.0V                  |
| V <sub>i</sub> Input Voltage   | -0.3V to V <sub>CC</sub> + 0.3V |
| V <sub>o</sub> Output Voltage  | -0.3V to V <sub>CC</sub> + 0.3V |



## Reflow Cycle

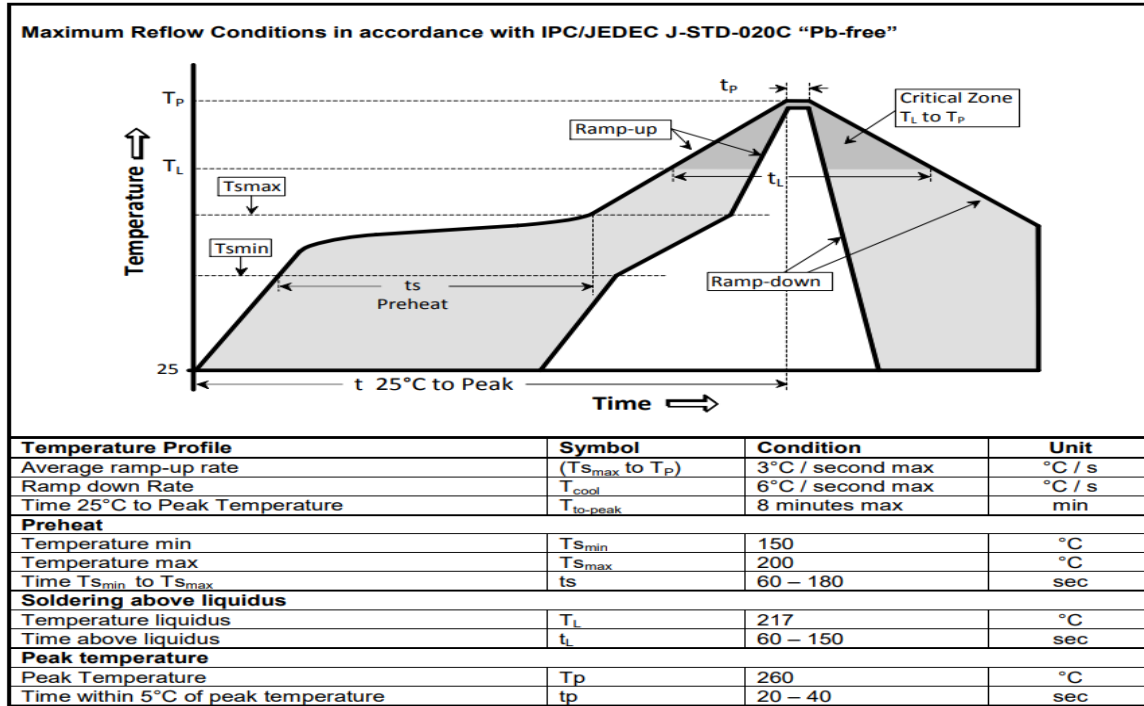

The part may be reflowed 2 times without degradation (typical for lead free processing).

## Tape and Reel

Tape and Reel available for quantities of 250 to 3000 per reel, cut tape for < 250. 8mm tape, 4mm pitch.

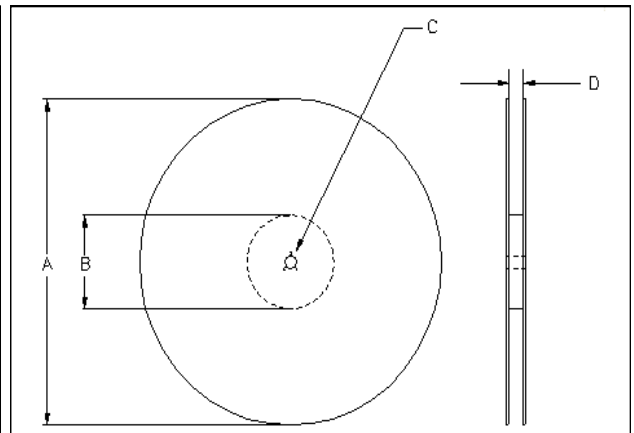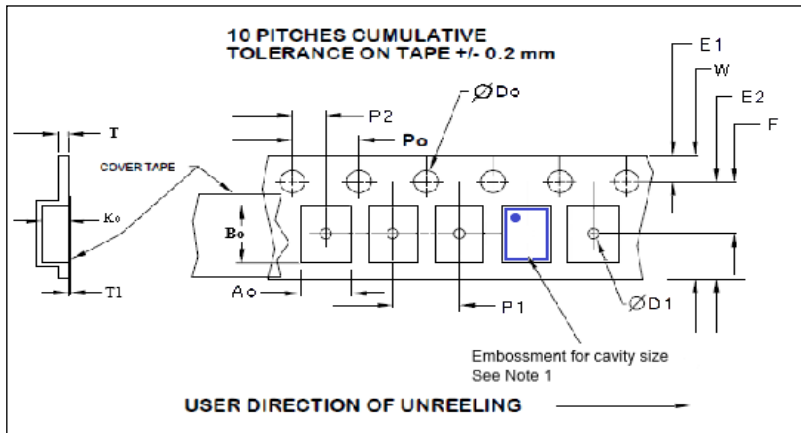

| Tape Size | E2 typ | F         | P1       | W max | Ao         | Bo         | Ko         |
|-----------|--------|-----------|----------|-------|------------|------------|------------|
| 8mm       | 6.25   | 3.5 ±0.05 | 4.0 ±0.1 | 8.2   | 2.25 ± 0.1 | 2.75 ± 0.1 | 1.15 ± 0.1 |

| Reel Size | A      |     | B      |    | C              | D                        |
|-----------|--------|-----|--------|----|----------------|--------------------------|
|           | Inches | mm  | Inches | mm | mm             | mm                       |
| 7         | 7.0    | 180 | 2.50   | 60 | 13.0 +0.5 -0.2 | Tape size +0.4 +2.0 -0.0 |

Dimensions in mm Drawing Not to scale  
Note 1: Embossed cavity to conform to EIA-481-B

| Tape Size | Do            | D1 min | E1        | Po       | P2        | T max | T1 max |
|-----------|---------------|--------|-----------|----------|-----------|-------|--------|
| 8mm       | 1.5 +0.1 -0.0 | 1.0    | 1.75 ±0.1 | 4.0 ±0.1 | 2.0 ±0.05 | 0.3   | 0.1    |



# PLETRONICS SM33J Series 2.5V CMOS Clock Oscillator

## Important Notice

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

### Contacting Pletronics Inc.

Pletronics, Inc.  
19013 36th Ave. West  
Lynnwood, WA 98036-5761  
U.S.A.

Tel: 425.776.1880  
Fax: 425.776.2760  
email: [ple-sales@pletronics.com](mailto:ple-sales@pletronics.com)  
URL: [www.pletronics.com](http://www.pletronics.com)