

PLETRONICS NCF4 Series Texe / Tevexe







2.0 x 2.5 x 1.0 mm LCC Ceramic Package

Features

- Pletronics' NCF4 Series Temperature Compensated Crystal Oscillator
- Optional Voltage Control Function
- Clipped Sine Wave Output
- 1.8V to 3.3V nominal Supply Voltage
- 10 40 MHz Frequency

Applications

GPS WiMAX, Wi-Fi, Wi-LAN Handsets **Broadband Access** Point to point radios Seismic Exploration Wireless Communications Base Stations **Test Equipment**

Electrical Characteristics							
Parameter	Min	Тур	Max	Unit	Condition (Consult factory for other options)		
Frequency Range ²	10	-	40	MHz	Specified by part number		
Frequency Stability vs. Temperature ²	±0.5	-	±2.5	ppm	Specified by part number (f _{max} - f _{min}) / 2		
Frequency Initial Calibration	-	-1	±2.0	ppm	Vcontrol 1.50 volts at 25°C \pm 2°C when V _{CC} \geq 2.5 volts Vcontrol 0.9 volts at 25°C \pm 2°C when V _{CC} \leq 2.4 volts If Vcontrol used		
Operating Temperature Range ²	-40	-	+85	°C	Specified by part number, Consult factory for wider range		
Supply Voltage 1, 2 V _{CC}	1.8	-	3.3	Volts	± 5%, Specified by part number		
Supply Current I _{CC}	-	2.0	3.0	mA	Load: 10 Kohm 10 pF, V _{CC} ± 5%		
Frequency Stability vs. Supply	-	-	±0.2	ppm	Load: 10 Kohm 10 pF, V _{CC} ± 5%		
Frequency Stability vs. Load	-	-	±0.2	ppm	Load: 10 Kohm 10 pF ± 5%		
Vcontrol Range	0.50 0.30	1.50 0.90	2.50 1.50	Volts	1.50 volts nominal for V_{CC} nominal \geq 2.5 volts 0.9 volts nominal for V_{CC} nominal \leq 2.4 volts		
Frequency Pullability ²	0	±8.0	±12.0	ppm	Specified by part number, Positive Slope		
Output Waveform		Clippe	d Sine Wa	ve	DC Coupled		
Output Level	0.8	-	-	V p-p	Load: 10 Kohm 10 pF ± 10%		
Startup Time	-	-	10.0	mS	Within ± 2.0 ppm of final frequency		
Long Term Stability (Aging)	-	-	±1.0	ppm	Per year at 25°C ± 2°C		
Phase Noise 100 Hz 1 kHz 10 kHz 100 kHz	-	-110 -130 -145 -145	-	dBc/Hz	25°C ± 2°C at 26.0 MHz		
Storage Temperature Range	-55	-	+85	°C			

² Specified by part number

Notes:

1 Place an appropriate power supply bypass capacitor next to device for correct operation



Part Number

Series Model	V _{cc} Suppl	Operating 1	Temperature	Stability 1, 2	Pullability ¹	Frequency	
	Lowest	Highest	Lowest	Highest	(ppm)	(ppm)	(MHz)
NCF4	031	035	С	G	015	008	-19.44M
	031 = 3.1 for 3.3 volts nominal 029 = 2.9 for 3.0 volts nominal 027 = 2.7 for 2.8 volts nominal 024 = 2.4 for 2.5 volts nominal 017 = 1.7 for 1.8 volts nominal	035 = 3.5 for 3.3 volts nominal 031 = 3.1 for 3.0 volts nominal 029 = 2.9 for 2.8 volts nominal 026 = 2.6 for 2.5 volts nominal 019 = 1.9 for 1.8 volts nominal	A = +10°C B = +5°C C = +0°C D = -5°C E = -10°C F = -15°C G = -20°C H = -25°C J = -30°C K = -35°C L = -40°C	A = +40°C B = +45°C C = +50°C D = +55°C E = +60°C F = +65°C G = +70°C H = +75°C J = +80°C K = +85°C	$005 = \pm 0.5$ $010 = \pm 1.0$ $015 = \pm 1.5$ $020 = \pm 2.0$ $025 = \pm 2.5$	000 = TCXO 005 = ±5 008 = ±8	10 - 40 MHz

¹ Contact Factory for non-standard specifications

Device Marking

Pff.f **YMxxx**

= Pletronics ff.f

= Frequency in MHz YM

= Date Code (Year Month) See below for YM codes

= All other markings are internal codes

Note: Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Code	8	9	0	1	2	Code	1	2	3	4	5	6	7	8	9	0	N	D
Year	2018	2019	2020	2021	2022	Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC

Package Labeling

Tape and Reel available for quantities of 250 to 1000 per reel, cut tape for < 250. 8mm tape, 4mm pitch.

P/N Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII

RoHs Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

NCF4017019JK005000-38.40M Customer P/N: 12345678 D/C

RoHS Compliant

2nd LvL Interconnect

Category=e4

Max Safe Temp=260C for 10s 2X Max

Pletronics Inc. certifies this device is in accordance with the RoHS 3 (2015/863) and WEEE 2 (2012/19/EU) directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's Weight of the Device: 0.02 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020D

Second Level Interconnect code: e4


Product information is current as of publication date. The product conforms to specifications per the terms of the Pletronics standard warranty. Aug 27, 2019 Rev. D Production processing does not necessarily include testing of all parameters.


² Not all stabilities are available with all operating temperature ranges. Contact Factory for exact combinations available.





Mechanical Dimensions

	Inches	mm
Α	0.098 ± 0.008	2.50 ± 0.20
В	0.079 ± 0.008	2.00 ± 0.20
С	0.031 ± 0.004	0.80 ± 0.10
D ¹	0.071	1.80
E ¹	0.024	0.60
F ¹	0.014	0.35
G ¹	0.020	0.50
H ¹	0.028	0.70









(Not to Scale)

Contacts (pads): Gold 11.8 to 39.4 µinches (0.3 to 1.0 µm) over Nickel 50 to 350 µinches (1.27 to 8.89 µm)

Pad	Function	Note
1	Vcontrol Input	If this function is not specified, recommend connecting this pad to ground.
2	NC	No external connection allowed
3	Ground (GND)	
4	Output	The output is DC coupled. Most commonly used with external coupling capacitor. 0.001 to 0.01µF recommended.
5	NC	No external connection allowed
6	V _{CC} Supply Voltage	Connect an appropriate power supply bypass capacitor as close as possible


For Optimum Jitter Performance, Pletronics recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans

¹ Typical dimensions



Electrical Test / Load Circuit

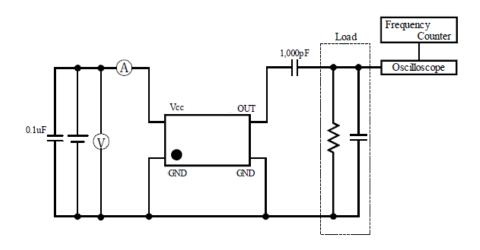

Environmental / ESD Ratings

Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	JESD22-B104
Vibration	JESD22-B103
Solderability	IPC J-STD-002
Thermal Shock	MIL-STD-883 Method 1011, Condition A

ESD Rating

Model	Min. Voltage	Condition			
Human Body Model	2000V	JESD22-A114			
Charged Device Model	500V	JESD 22-C101			
Machine Model	200V	JESD22-A115			

Absolute Maximum Ratings


Parameter	Unit
V _{CC} Supply Voltage	-0.6V to +4.6V
Vi Input Voltage	-0.6V to V _{CC} + 0.6V
Io Output Current	-10mA to +10mA

Thermal Characteristics:

The maximum die or junction temperature is 155° C The thermal resistance junction to board is 30 to 50° C/Watt depending on the solder pads, ground plane and construction of the PCB.




Reflow Cycle

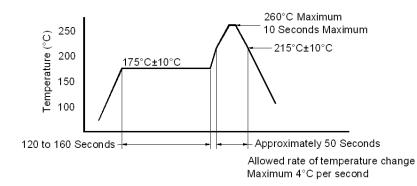

The part may be reflowed 2 times without degradation (typical for lead free processing).

Tape and Reel

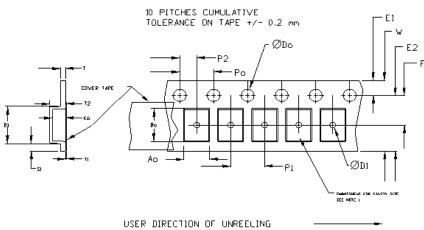


	Tape Constant Dimensions Table 1											
	Tape Size	Do	D1 min	E1	Ро	P2	S1 min	T max	T1 max			
F	8mm		1.0			2.0						
	12mm	1.5	1.5	1.75	4.0	±0.05	0.6	0.6	0.1			
	16mm	+0.1 -0.0	1.5	±0.1	±0.1	2.0	0.6	0.6	0.1			
	24mm		1.5			±0.1						

Tape Variable Dimensions Table 2										
Tape Size	B1 max	E2 min	F	P1	T2 max	W max	Ao, Bo & Ko			
8mm	4.2	6.25	3.5 ±0.05	4.0 ±0.1	2.0	8.3	Note 1			

Dimensions in mm Drawing Not to scale

Note 1: Embossed cavity to conform to EIA- 481-B



Reel Dimensions (may vary) Table 3									
		A	В		С	D			
Reel Size	Inches	mm	Inches	mm	mm	mm			
7	7.0	177.8	2.50	63.5	13.0	Tape size +0.4			
10	10.0	254.0	4.00	101.6	+0.5	+2.0			
13	13.0	330.2	3.75	95.3	-0.2	-0.0			



Important Notice

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

Contacting Pletronics Inc.

Pletronics, Inc. 19013 36th Ave. West Lynnwood, WA 98036-5761 U.S.A.

email: ple-sales@pletronics.com URL: www.pletronics.com