

PLETRONICS 3M44J Series 3.3V CMOS Clock Oscillator







SM44JV 3.2 x 2.5 x 0.95 mm LCC Ceramic Package

Features

- Quartz crystal controlled precision square wave oscillator
- CMOS Output (will interface with TTL devices)
- Enable/Disable Function includes low standby power
- Low Jitter
- 3.3V nominal Supply Voltage
- 1.25-170 MHz Frequency Range

Applications

Driving A/Ds, D/As, FPGAs Digital Video Ethernet, GbE Medical Storage Area Networking COTS Broad Band Access SONET/ SDH/ DWDM Base Stations/ Picocell Test & Measurement

Electrical Characteristics					
Parameter	Min	Тур	Max	Unit	Condition
Frequency Range ²	1.25	-	170	MHz	Consult factory for other options
Frequency Stability 2 $\pm 20 = 20^*$, $\pm 25 = 44$, $\pm 50 = 45$	±20	1	±50	ppm	Includes supply voltage change, load change, aging for 1 year at 25°C \pm 2°C, shock, vibration and temperatures. *limited frequencies, see page 3
Operating Temperature Range ²	-10 -20 -40		+70 +70 +85	°C	Standard range Extended range C option Extended range E option
Supply Voltage ^{1, 2} V _{CC}	2.97	3.30	3.63	V	3.3V ± 10%
Output Waveform		CM	ios		
Duty Cycle	45	-	55	%	At 50% Vcc
Output V _{HIGH} VOH	V _{CC} - 0.4	-	-	V	
Output V _{LOW} VOL	-	-	0.4	V	See Load Circuit
Output T _{RISE} and T _{FALL}	-	1	5	ns	C _{LOAD} = 15 pF 10% to 90% of V _{CC} See Load Circuit
Startup Time	-	-	10	ms	Time for output to reach specified frequency
V _{DISABLE} VIL	-	-	0.3Vcc	V	
V _{ENABLE} VIH	0.7Vcc	ı		V	
Output Enable Time	-	-	100	ns	Time for output to reach a logic state
Output Disable Time	-	-	200	ns	Time for output to reach a high Z state
Enable/Disable Internal Pull-up	30	70	150	ΚΩ	To V _{CC}
Output Leakage $V_{OUT} = V_{CC}$ $V_{OUT} = 0V$	- -10	-	+10 -	μA	
Standby Current	-	-	10	μΑ	Pad 1 low, device disabled
rms Phase Jitter	-	0.1	1.0	ps	Fo ≥ 40MHz; 12kHz ~ 20MHz
Phase Noise 10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz 10 MHz 10 MHz 10 MHz	-	-78 -107 -132 -144 -151 -155 -158	-	dBc/Hz	25°C ± 2°C at 100 MHz
Storage Temperature Range	-55	-	+125	°C	

Notes: Specifications with Pad 1 E/D open circuit

Place an appropriate power supply bypass capacitor next to device for correct operation

² Specified by part number



PLETRONICS 3M44J Series 3.3V CMO5 Clock Oscillator

Electrical Characteristics											
Parameter	Min	Тур	Max	Unit	Condition						
Supply Current I _{CC}		0.9 1.4 1.5 1.7 3.5 4.0 4.5 5.5 7.0	1.8 2.8 3.0 3.4 7.0 8.0 9.0 10.5 13.5 21.0	mA	3 MHz 5 MHz 10 MHz 20 MHz 50 MHz 65 MHz 85 MHz 100 MHz 133 MHz 170 MHz	no load					

Specifications with Pad 1 E/D circuit open



PLETRONICS 3M44J Series 3.3V CMOS Clock Oscillator

Part Nu	Part Number												
Series Model	Ties del Frequency Stability Operating Temperature Range		Supply Voltage V _{cc}	Frequency in MHz	Optional T&R Packaging code								
SM44	45	J	E	V	- 125.0M	-XX							
	45 = ± 50 ppm (STD) 44 = ± 25 ppm 20* = ± 20 ppm		Blank = -10 to +70°C (STD) C = -20 to +70°C E = -40 to +85°C	V = 3.3V ± 10%	1.25 - 170	T250 = 250 per Reel T500 = 500 per Reel T3K = 3000 per Reel (Std)							

^{*} Contact PLE sales for limited frequencies. Full frequency range available which excludes aging.

Device Marking

PFF.FF M YMDxx PFF.FF M
• YMxxx

P = Pletronics
FF.FF = Frequency in MHz

YMD or YM = Date Code, All other marking is internal code

Note: Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Codes for Date Code YMD (Year Month Day)

Code	3	4		5	6	7	Cod	е	A	В	С	D	Е	F	:	G	Н	J	K	L	М
Year	2023	202	4	2025	2026	2027	Mon	th J	AN	FEB	MAR	APR	MA'	Y JL	IN	JUL	AUG	SEP	OCT	NOV	DEC
								,					•								
Code	1	2	3	4	5	6	7	8	9	Α	В	С	D	E	F	G	i				
Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	5 16	6				
Code	Н	J	K	L	M	N	Р	R	Т	U	V	W	X	Υ	Z						
Day	17	18	19	20) 2	22	23	24	25	26	27	28	29	30	31						

Package Labeling

P/N Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII

P/N: PLE Part Number
Customer P/N: Ple 12345678
Qty: Ple 1

3000 MSL: 1

D/C

RoHs Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

RoHS Compliant

2nd LvL Interconnect

Category=e4

Max Safe Temp=260C for 10s 2X Max

Pletronics Inc. certifies this device is in accordance with the RoHS and REACH directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's Weight of the Device: 0.024 grams


Moisture Sensitivity Level: 1 As defined in J-STD-020D


Second Level Interconnect code: e4



PLETRONICS 3M44J Series 3.3V CMOS Clock Oscillator

Mechanical Dimensions







Pad Connections

Pad	Function
1	Enable/Disable
2	Ground
3	Output
4	Vcc

ENABLE/DISABLE						
Pad 1	Output					
VIH/Open	Active					
VIL/Gnd	Disabled/Tristate					

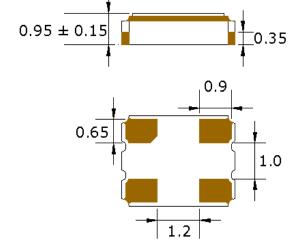



Dimensions in mm

Pad Layout Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

Contacts (pads): Gold (0.3 to 1.0 µm) over Nickel (1.27 to 8.89 µm)


For Optimum Jitter Performance, Pletronics recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans




PLETRONICS 3M44J Series 3.3V CMOS Clock Oscillator

Electrical Test / Load Circuit

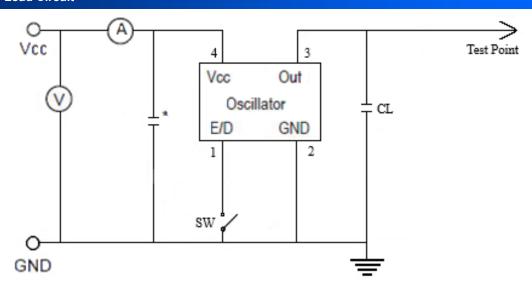

Notes:

CL: Includes the input capacitance of oscilloscope * 0.01µF external by-pass filter is recommended

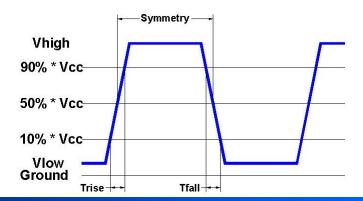

Environmental / ESD Ratings

Reliability: Environmental

Parameter	Condition
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	IPC J-STD-002
Thermal Cycle	MIL-STD-883 Method 1010, Condition B

Thermal Characteristics:

The maximum die or junction temperature is150°C

ESD Rating

Model	Min. Voltage	Condition		
Human Body Model	2000V	JESD22-A114		
Machine Model	200V	JESD22-A115		


Absolute Maximum Ratings

Parameter	Unit
V _{CC} Supply Voltage	-0.3V to +4.0V
Vi Input Voltage	-0.3V to V _{CC} + 0.3V
Vo Output Voltage	-0.3V to V _{CC} + 0.3V



PLETRONICS 3M44J Series 3.3V CMO5 Clock Oscillator


Reflow Cycle

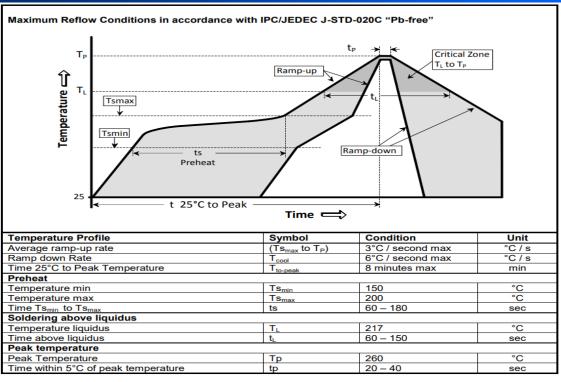

The part may be reflowed 2 times without degradation (typical for lead free processing).

Tape and Reel

Tape and Reel available for quantities of 250 to 3000 per reel, cut tape for < 250. 8mm tape, 4mm pitch.

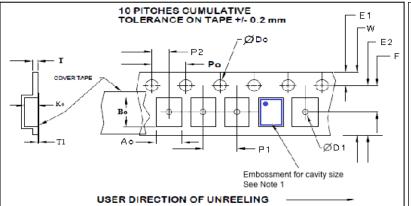

— n
— u

	Tape Variable Dimensions Table 2											
Tape Size	E2 typ	F	F P1		Ao	Во	Ko					
8mm	6.25	3.5 ±0.05	4.0 ±0.1	8.2	2.7±0.1	3.4±0.1	1.4±0.1					

Dimensions in mm Drawing Not to scale Note 1: Embossed cavity to conform to EIA- 481-B

Tape Constant Dimensions Table 1										
Tape Size	Do	D1 min	E1	Ро	P2	T max	T1 max			
0,000,000	1.5		1.75	4.0	2.0	0.3	0.1			
8mm	+0.1 -0.0	1.0	±0.1	±0.1	±0.05	0.3	0.1			

Reel Dimensions (may vary) Table 3						
	Α		В		С	D
Reel Size	Inch- es	mm	Inches	mm	mm	mm
_					13.0	Tape size +0.4
7	7.0	177.8	2.50	63.5	+0.5 -0.2	+2.0 -0.0



PLETRONICS 3M44J Series 3.3V CMO5 Clock Oscillator

Important Notice

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

Contacting Pletronics Inc.

Pletronics, Inc. 19013 36th Ave. West Lynnwood, WA 98036-5761 U.S.A. Tel: 425.776.1880 Fax: 425.776.2760

email: ple-sales@pletronics.com URL: www.pletronics.com